

tablo

Better begins now.

The Tablo® Hemodialysis System is changing dialysis.

Tablo is designed from the inside out to offer a better experience for patients and care teams.

All-in-one technology

Fully integrated with onboard water purification

Easy to learn & use

Train new nurses in hours, new patients in days

Connected & intelligent

Streaming data from Tablo to the cloud



Having Tablo in-house has worked really well for us. It's very intuitive to use. It has been a big benefit for the nurses, the system, the pharmacy, patient outcomes, and everything else from top to bottom.

tablo





Intelligent, intuitive dialysis.

From hospital to home, Tablo simplifies dialysis. Compact in design and simple to set up, with just tap water and an outlet, dialysis can be done virtually anywhere.



Now I'm in charge. I do treatment when I want, I feel better, and I have a better quality of life.

-Tablo home dialysis patient




It has helped patients not only stay onsite but also allows some to dialyze just three times a week when they might have required five or six sessions a week using a different system.



-Skilled Nursing Facility **Operations Executive**

Access your Tablo data anywhere, anytime with TabloHub®

Simplify device management with a secure, cloud-based enterprise platform providing centralized reports, and actionable diagnostics.

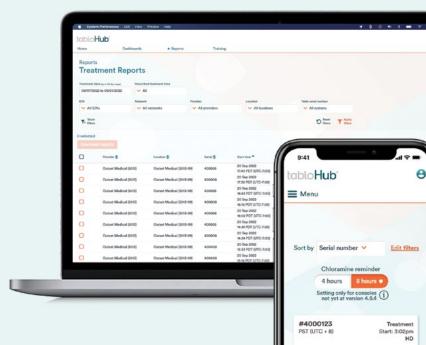

Key Features

1 WIRELESS CONNECTIVITY

Two-way data communication can automatically send treatment data to the cloud and provide virtual support

2 TOUCHSCREEN GUIDANCE

Animations and conversational instructions make Tablo easy to learn and use

3 SENSOR-BASED AUTOMATION

Tablo sensors help to automate much of the setup, treatment management and maintenance

4 TABLO CARTRIDGE

Minimizes setup and take down time by removing manual steps

5 DIALYSATE ON DEMAND

Purifies water and produces dialysate in real-time

6 MOBILITY

All you need is an electrical outlet and tap water



We are invested in your success

Outset Medical is dedicated to providing an exceptional user experience through our full suite of service offerings designed to meet your specific needs. Our service plans enable dependable support for all elements of the Tablo Hemodialysis System including console, software, and TabloCart[™].



The service has been impeccable. And they stay in touch with you, they walk you through every step of the way.



Technical Specifications

TabloCart

TabloCart is an optional accessory that helps you easily get anywhere. And the prefiltration option is designed to help remove sediment and minerals from supply water before it enters Tablo.



TabloCart with Storage Drawer

- 360-degree rotating wheels
- Directional locking rear wheels
- Storage drawer for supplies

DESIGN FEATURES	
Wheels	5-inch, 360-degree rotation, directional locking in the rear
Storage	Integrated drawer for storing supplies
Testing Standards	IEC 60601-1

PHYSICAL SPECIFICATIONS		
Dimensions	11.1"H x 22.5"W x 30.0"D	
Weight	34 lbs/15 kg	



TabloCart with Prefiltration

- Three customizable filter configurations
- Booster pump included
- Visual display for filter life and cart servicing
- 360-degree rotating wheels
- Directional locking rear wheels

DESIGN FEATURES	
Wheels	5-inch, 360-degree rotation, directional locking in the rear
Prefiltration	Sediment and/or chlorine/ chloramine prefiltration of incoming water for the Tablo Hemodialysis System
Booster Pump	Enhances incoming water pressure
Visual Display	Indicates filter life, cart servicing and water pressure status
Testing Standards	IEC 60601-1

FILTER CONFIGURATION	
Filter Configurations	SC: One sediment, one carbon 2S: Two sediment 2C: Two carbon
Recommended Filters	Omnipure ELF XL 5M Sediment, Omnipure ELF XL 1M Chloramines
Filter Replacements	Individually replaceable by user

Incoming Temperature	5-32 °C
Incoming Pressure	5-80 PSI
PHYSICAL SPECIFICAT	TONS
PHYSICAL SPECIFICAT Dimensions	TIONS 11.1"H x 22.5"W x 30.4"D

Technical Specifications

Tablo Hemodialysis System

TREATMENT SPECIFIC	
Blood Flow Rate	Up to 400 mL/min
Extracorporeal	140 mL
Circuit Volume	(excluding dialyzer)
Maximum Ultra- filtration Rate	2,000 mL/hr
UF Accuracy for DFR ≤ 100 mL/min and UF rate ≤ 500 mL/hr	±50 mL/hr
UF Accuracy for all other settings	±100 mL/hr
Dialysate Flow Rate (DFR)	PRO+: 50-300 mL/min Std.: 100-300 mL/min
Dialysate Preparation	Standard 45X proportioning
Dialysate Concentrates	Bicarbonate and Acetate/Citrate acid
Dialysis Fluid Potassium (K)	0K, 1K, 2K, 3K
Dialysis Fluid Calcium (Ca)	0, 1.0, 1.5, 1.75, 2.0, 2.25, 2.5, 2.75. 3.0, 3.25, 3.5 Ca
Sodium Setting	130-145 mEq/L
Total Buffer Setting	30-40 mEq/L
Dialysis Fluid Temperature	35-38 °C
Dialyzers	Commercially available high-flux dialyzers
Treatment Duration	PRO+: 5 minutes - 24 hours Std.: 5 minutes - 12 hours
WATER SPECIFICATION	NS
Input Water Source	EPA Primary or

WATER SPECIFICATION	IS
Input Water Source	EPA Primary or Secondary standards for drinking water
Incoming Temperature	5-32 °C
Incoming Pressure	30-80 PSI
Filtration	Integrated Sediment, Carbon, RO, Ultrafilter
Outputs Purified Water	AAMI standards met

MAINTENANCE FEATURES	
Disinfection	 Automated heat disinfection (required within 24 hours of any treatment) Full and quick chemical disinfection cycles
Filter Replacements	Individually replaceable by user
USER LEVELS	
Professional Care	Enables healthcare professionals to manage all patient information and treatment
Self Care	Enables non-healthcare professionals to manage part of the treatment under supervision
TREATMENT FEATURES	
Saline Flush	Automatic fluid removal adjustment Manual and

IREALWENT FEATURES	
Saline Flush	 Automatic fluid removal adjustment Manual and scheduled options
Saline Bolus	Manual with automatic volume tracking
Blood Return	Automated and adjustable rate
Blood Pressure	Integrated blood pressure cuff
Wireless Connectivity	Two-way data transfer
Prime Time	8 minutes

TREATMENT MODALITIES	
IHD	Intermittent Hemodialysis
SLED/SLEDD	Sustained Low Efficiency Dialysis
PIRRT	Prolonged Intermittent Renal Replacement Therapy
UF	Isolated Ultrafiltration

PHYSICAL SPECIFICATIONS	
Dimensions	35.2"H x 17.7"W x 26.9"D
Dry Weight	195 lbs/88 kg



© 2025 Outset Medical, Inc

1081-v11